

MODEL 66 Voltage  
MODEL 67 and 67-C  
Voltage

ATWATER KENT MFG. CO.

VOLTAGE DATA FOR MODEL 66

Line voltage 110. Line voltage of 120 volts increases voltage 10%.


Tube	Filament	Plate	Grid	Screen
R-F (1st)	2.2	158	5.5	110
R-F (2nd-3rd)	2.2	160	2.8	78
Detector	2.2	206	23.	
A-F (1st)	2.2	137	2.8*	
A-F (2nd)	6.9	412	78.	

\* This is the measured voltage, not the actual operating voltage.

66

(A.O.) 67

(Batt.)

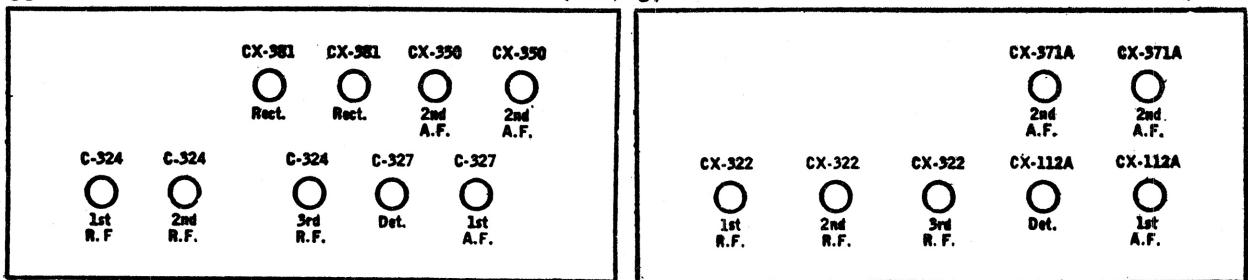

VOLTAGE DATA FOR MODELS 67 and 67-C

These values apply when the total "B" voltage is 150 volts.

Tube	Filament	Plate	Grid	Screen
RF (1st-2nd)	3.3	110	1.5	30
R-F (3rd)	3.3	110	2.5	25
Det.	3.6	50	--	
A-F (1st)	5.0	55	4.5	
A-F (2nd)	5.0	150	45.	

These values apply when the total "B" voltage is 180 volts.

Tube	Filament	Plate	Grid	Screen
R-F (1st-2nd)	3.3	135	1.5	45
R-F (3rd)	3.3	135	2.5	40
Det.	5.0	60	--	
A-F (1st)	5.0	65	4.5	
A-F (2nd)	5.0	180	45.	